

KHAV - SL Studio KH HD

Cabling Diagrams & Specifications

Standard Installation using digital, widescreen SDI-HD cameras
(Sony BRC-Z330 and others soon)

- Adapted diagrams for video infrastructure using digital, widescreen, native SDI-HD cameras to make the full infrastructure SDI-HD only.

Table of Contents

Introduction	3
Network Cabling Infrastructure	5
Audio Cabling Infrastructure	6
Video Cabling Infrastructure	7
CAMX Controller Wiring	9
A/V System Locations & Cable Routing	11
Components List	14
A/V System Components	14
Specifications Cat5e Cabling	17
Specifications RG6/S-Video/HDMI Cabling	18
Cable Termination	19
Cat5e Cable Terminations	19
RG6 Video Cable Terminations	19
Sony BRC-Z330 Camera Connections	20
ATEM Television Studio (35)	21
ATEM Inputs	21
SDI Audio Extractor (25)	22
SDI Splitter Connections (15)	23

Introduction

This document contains a template for Kingdom Hall Audio / Video system for combined use by both hearing and sign language congregations. It leverages the same infrastructure so all audiences (including sign language) can benefit from HD video presentations and a modern distribution architecture.

SL Studio KH HD is a modernized version of the SL Studio KH version that uses the recently released branch proposed SDI-HD infrastructure to distribute the video signal instead of using composite video. It also uses a professional studio grade HDMI/SDI-HD video mixer to provide cross faded switching between camera feeds and media. All media stays digital delivering the quality that is available for download from jw.org without degradation.

SL Studio KH HD is a single application with the following integrated features:

- Seamless semi automatic switching between camera feeds for stage and audience and media using cross fading
- Support for controlling studio grade PTZ cameras. Perfectly framed audience participants can be switched on screen in less than 4 seconds using seating overlay view presets and nose pointing technology.
- Automatic blackout for fast movements to presets of cameras that are currently on screen
- Automatic selection of stage camera after media finishes playing
- One button update and synchronization of over 300 GB media set for sign language clips (by using companion SL Media Updater app)
- Simple selection of media by just typing in the desired scripture(s), ranges of scriptures, song numbers, publications (book abbreviation, chapter, paragraph), magazine (article, paragraph(s), question).
- Drag & drop capability for all of media, including pictures and all other media types supported (JPG, PNG, GIF, PDF files, etc.)
- Create playlists by adding currently selected media to the list (one button add), or drag & drop media onto the playlist to enter it. Playlists can be saved and used at a later time on all SL Studio systems in KHs and AHs and even other KHAudio systems.
- Import text file list of needed media into playlists for ultra fast and light weight meeting part setup
- Full scrolling capability through selected media. Select chapters within a media file from scrollable list (media chapters can be verses in a bible chapter, or paragraphs in a publication). Single step frames. Set frame accurate In/Out points of media for playback (allows you to play portions of a verse or any point that is not on a media chapter boundary).
- Step through playlist for presentation. Skip over or backup any entry in the playlist. Select different media in addition to the playlist entries and then simply continue with the rest of the playlist. Allows for dynamic changes if needed.
- All equipment controlled, configured and switched on/off automatically using a single click by the operator upon activation (assuming controllable devices are used of course).

KHAudio/Video is a single application with the following completely integrated features:

- microphone signal mixing (up to 16 channels)
- song-, background music and external track playback
- recording to date/time stamped MP3 files
- internet based conferencing for shut-ins (eliminating old style telephone lines)
- video, slides and streaming media playback
- playlist handling for more complex presentations (compatible with KHAV Playlist Editor, SL Studio Personal/Group/KH/AH and Cobalt Sound System for AHs)
- direct digital audio connections to KHs on same network (double KHs) or over internet for overflow situations or special programs
- fully configurable audio processing including dyn. voice compression, parametric filtering, equalization, bandpass filtering, tel. compression, FM compression, delays, etc.
- optional auto gating and auto mixing (avoiding unnecessary feedback)
- specific features for KH use like Auto Mute Roving Mics, Auto Recording & Splitting, Auto Conf Connection, etc.
- KHConf and MetroConf real-time callers list and count
- fast setup and configuration with built-in spectrum analyzer
- full integration with SL Studio KH, leveraging video equipment already present in KHs with sign language congregations
- optional integration with the KH Control System, automatic shutdown of equipment, lighting controls for media presentations


In this doc you will find all the necessary schematics (following branch proposed video infrastructure) for a completely integrated system along with routing schemes, components lists, cable lists, etc. Budgeting can be derived easily from those lists by researching the given part numbers or other specs. Many components can be viewed as optional (dashed outlines) and you can obviously mix and match your specific configuration to your needs. If your KH happens to have an SL Studio KH system and/or a KH Control system, then KHAudio can be configured to integrate with those systems leveraging the already installed infrastructure. This can be useful for automatically switching off lights that interfere with certain presentations, switching certain equipment or sharing video equipment. In such cases all equipment can be controlled from within the KHAudio application. No running around with IR remotes etc.

Network Cabling Infrastructure


The system uses an Ethernet network to allow for fast pre-meeting media downloads, presentation control from the KHAV Player app (see Apple App Store), and integration with SL Studio KH, the KH Control System and/or other equipment controllers and devices. IP protocol controllable monitors can be turned on and properly configured by KHAudio if such protocols are publicly available (coming soon). For equipment that is controllable over serial connections, KHAudio will use the CAMX Controller to control such equipment. Any KHs that have SL Studio KH, already have such controller (or the older model that can also be used).

The network connections are also leveraged for Voice over IP (VOIP) based telephone connections to conferencing systems like KHConf or MetroConf.

All network cabling and components to be installed for 1 Gb infrastructure

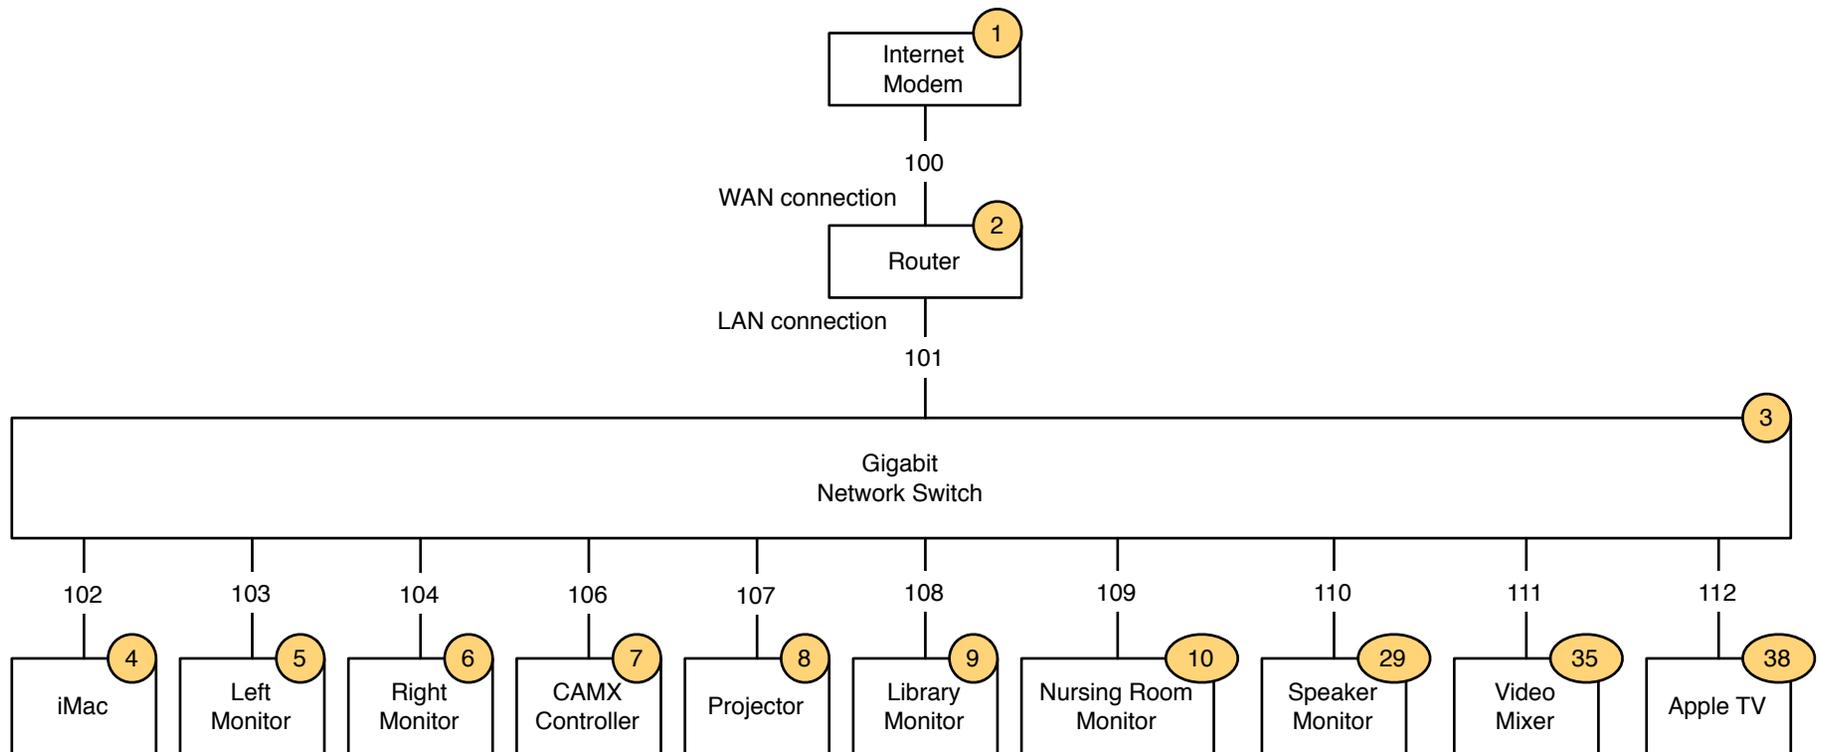


Audio Cabling Infrastructure

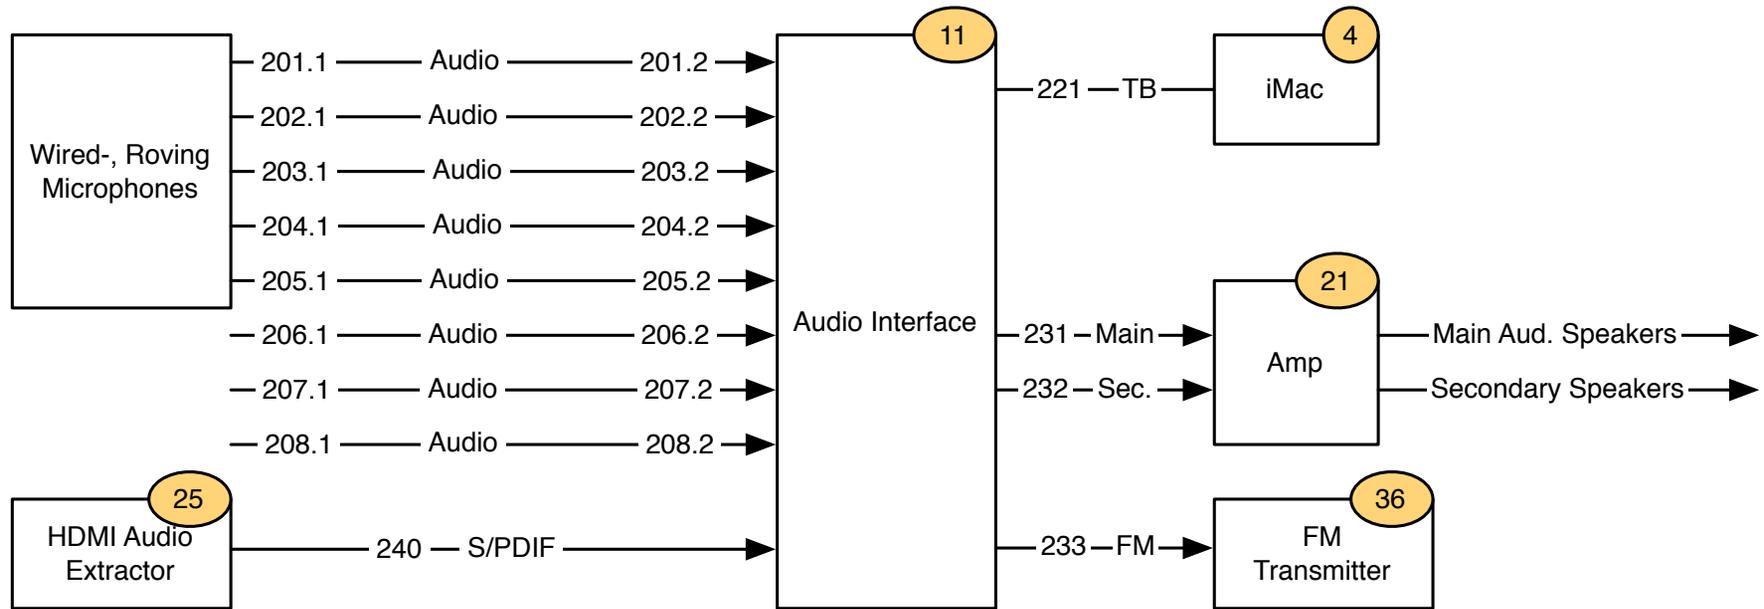


- Conferencing connections to services like KHConf and MetroConf are all established using internet connections. No need for telephone interfaces.
- Recording is handled in software. No need for recording equipment.
- Playback of songs, background music in multiple languages and external tracks is handled in software. No need for playback equipment.
- All mixing, sound processing, filtering, etc is done in software. No need for external mixers or sound processing equipment other than an interface and an amp.
- Very straightforward microphone to interface wiring and interface to amplifier and FM transmitter wiring (virtually the only analog wiring).
- Very simple configuration. Templates can be copied from KH to KH. Backup of a complete KH setup can be saved in seconds.

Video Cabling Infrastructure

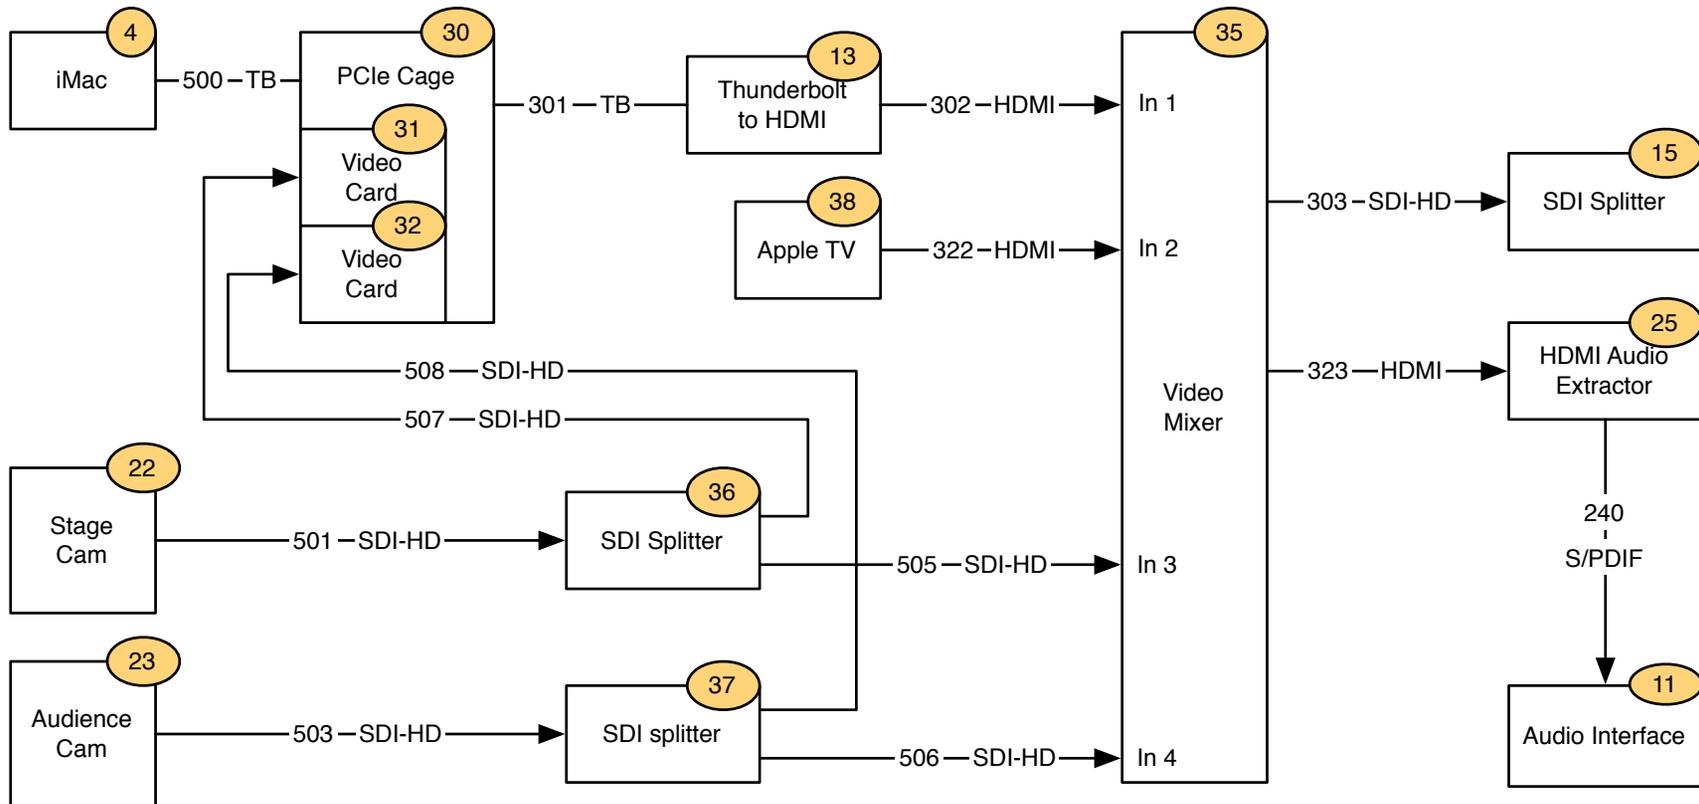

Video System Diagram


- All presentation of video tracks, still pictures, year texts, lyrics, external audio tracks and streaming content is handled in KHAudio or SL Studio KH HD. No need for other software or equipment.
- See cabling specs in tables below.
- All HDMI cables facilitate short connections inside the A/V console (so short cables).
- All projection devices have their own SDI-HD feed reducing the possibility of a single point of failure.
- Audio embedded in video tracks will be routed from HDMI audio extractor to audio interface input typed Media.

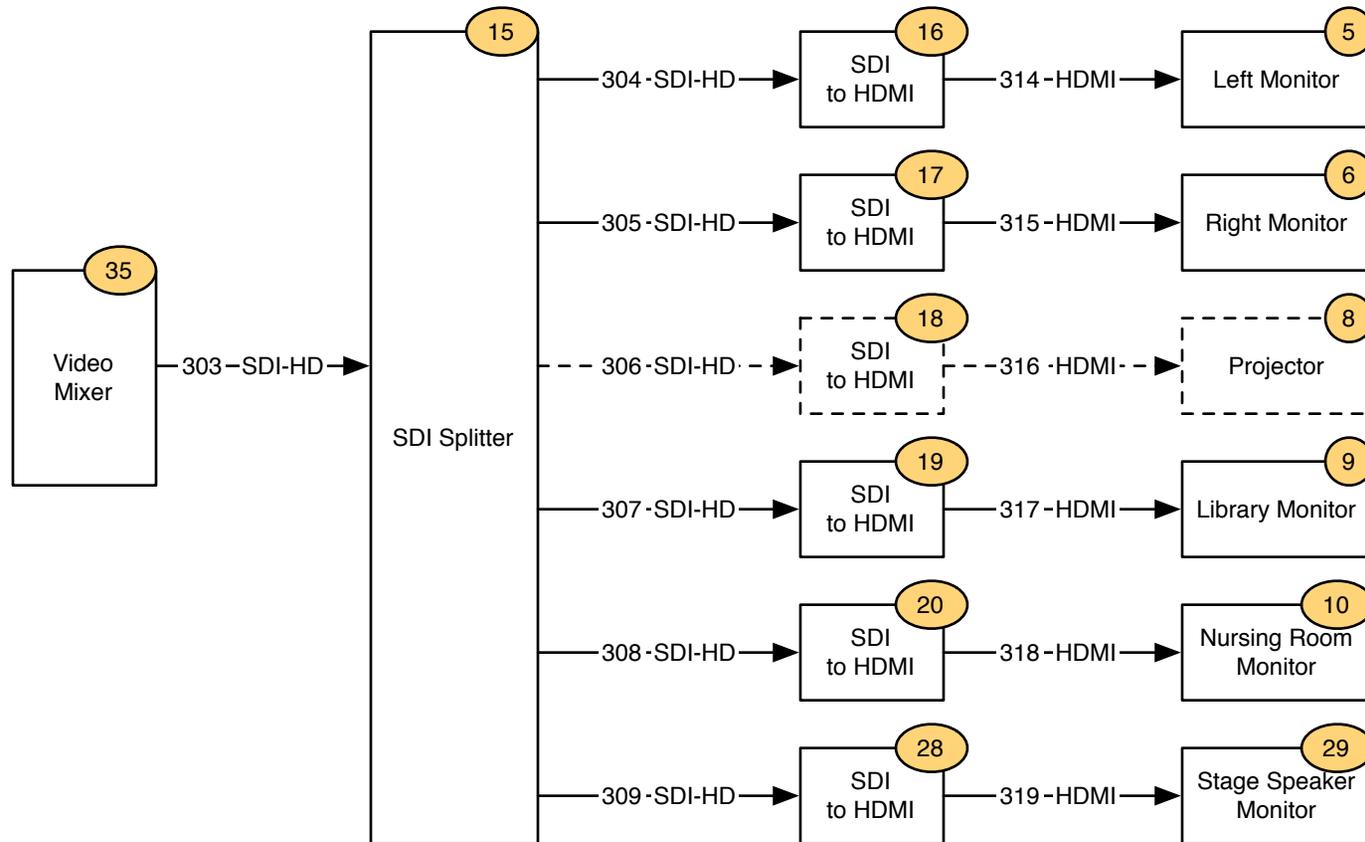

Video Distribution Diagram

- Splitter at A/V operator console, SDI-HD cabling using spec'd cables to monitor/projector destinations. See cable routing diagrams.
- All HDMI cables facilitate connection from SDI to HDMI converter to projector and/or monitors only (they should be very short).
Control Cabling Infrastructure


CAMX Controller Wiring

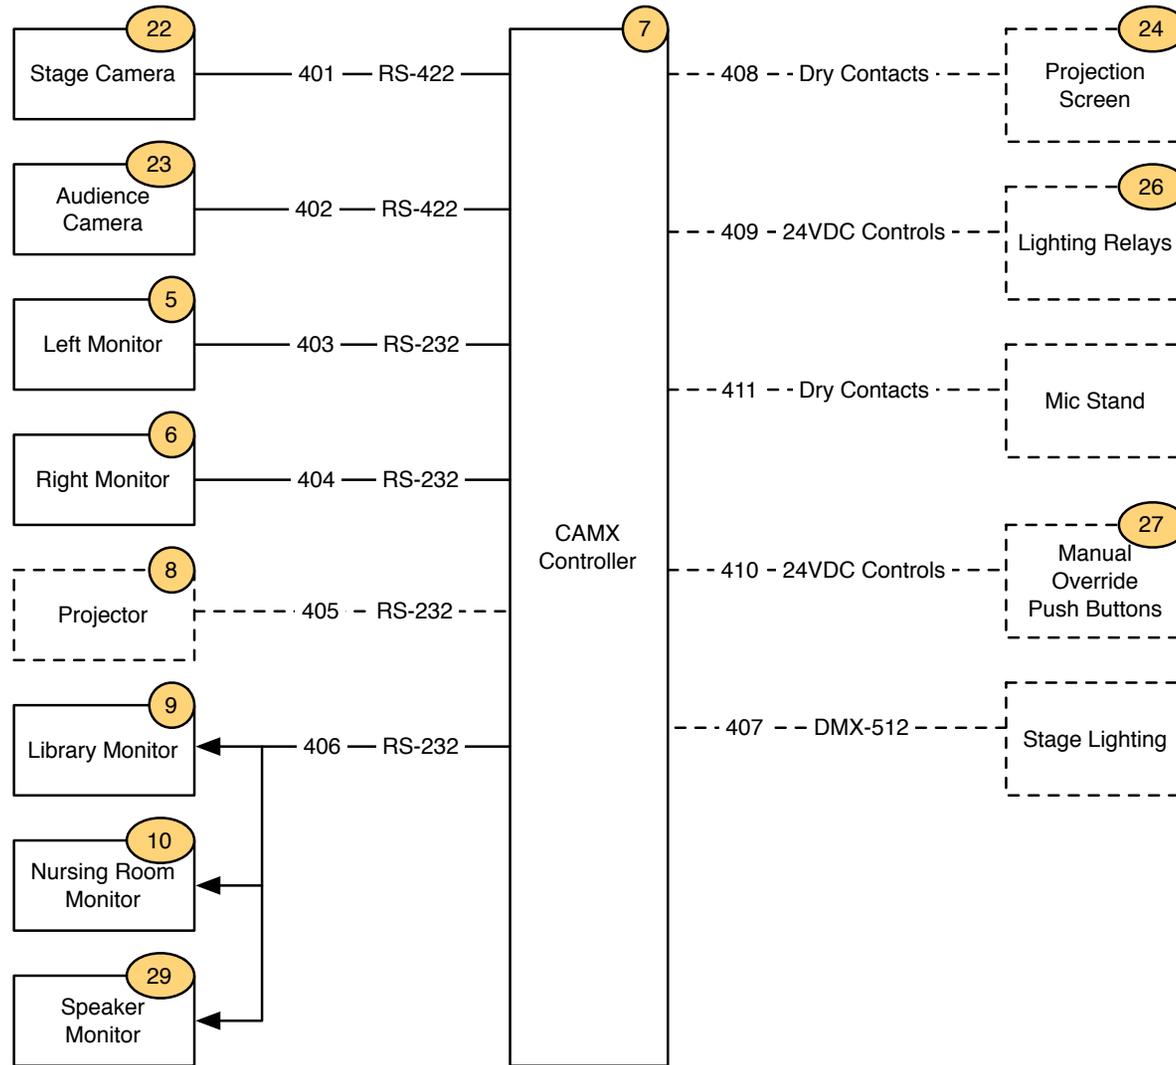


Control System Diagram

- During or before the meeting all equipment can be turned on with a single click on the Equipment On button. Monitors/projector will come on with the proper video input, resolution, aspect ratio, etc selected.
- When done, a click on Equipment Off will pull up the screen, turn on the stage lights, turn monitors and projectors off.
- During the meetings, no commercials will appear as KHA/V or SL Studio will keep the monitors/projectors in blackout until actual media is presented. After a video track has ended or the speaker proceeds from a still picture, the screens will fade to black.
- When enabled the Year Text in the selected language for the meeting will appear after a configurable time when no media is being shown.
- When enabled Lyrics will show up automatically in the selected language for the meeting in sync with the song being played. As the lyrics file format is lightweight rich text document (RTF) based, it can be easily extended for any language.
- Mic stand controls with up/down controls from the main panel of KHA are supported on output 4 (up) and output 5 (down).
- Alternatively equipment and lighting can be controlled directly from push buttons behind the stage wall (optional install). This allows for extra redundancy.


KHAV-SL Studio KH HD using Digital HD Cameras - Cabling Diagrams & Specifications

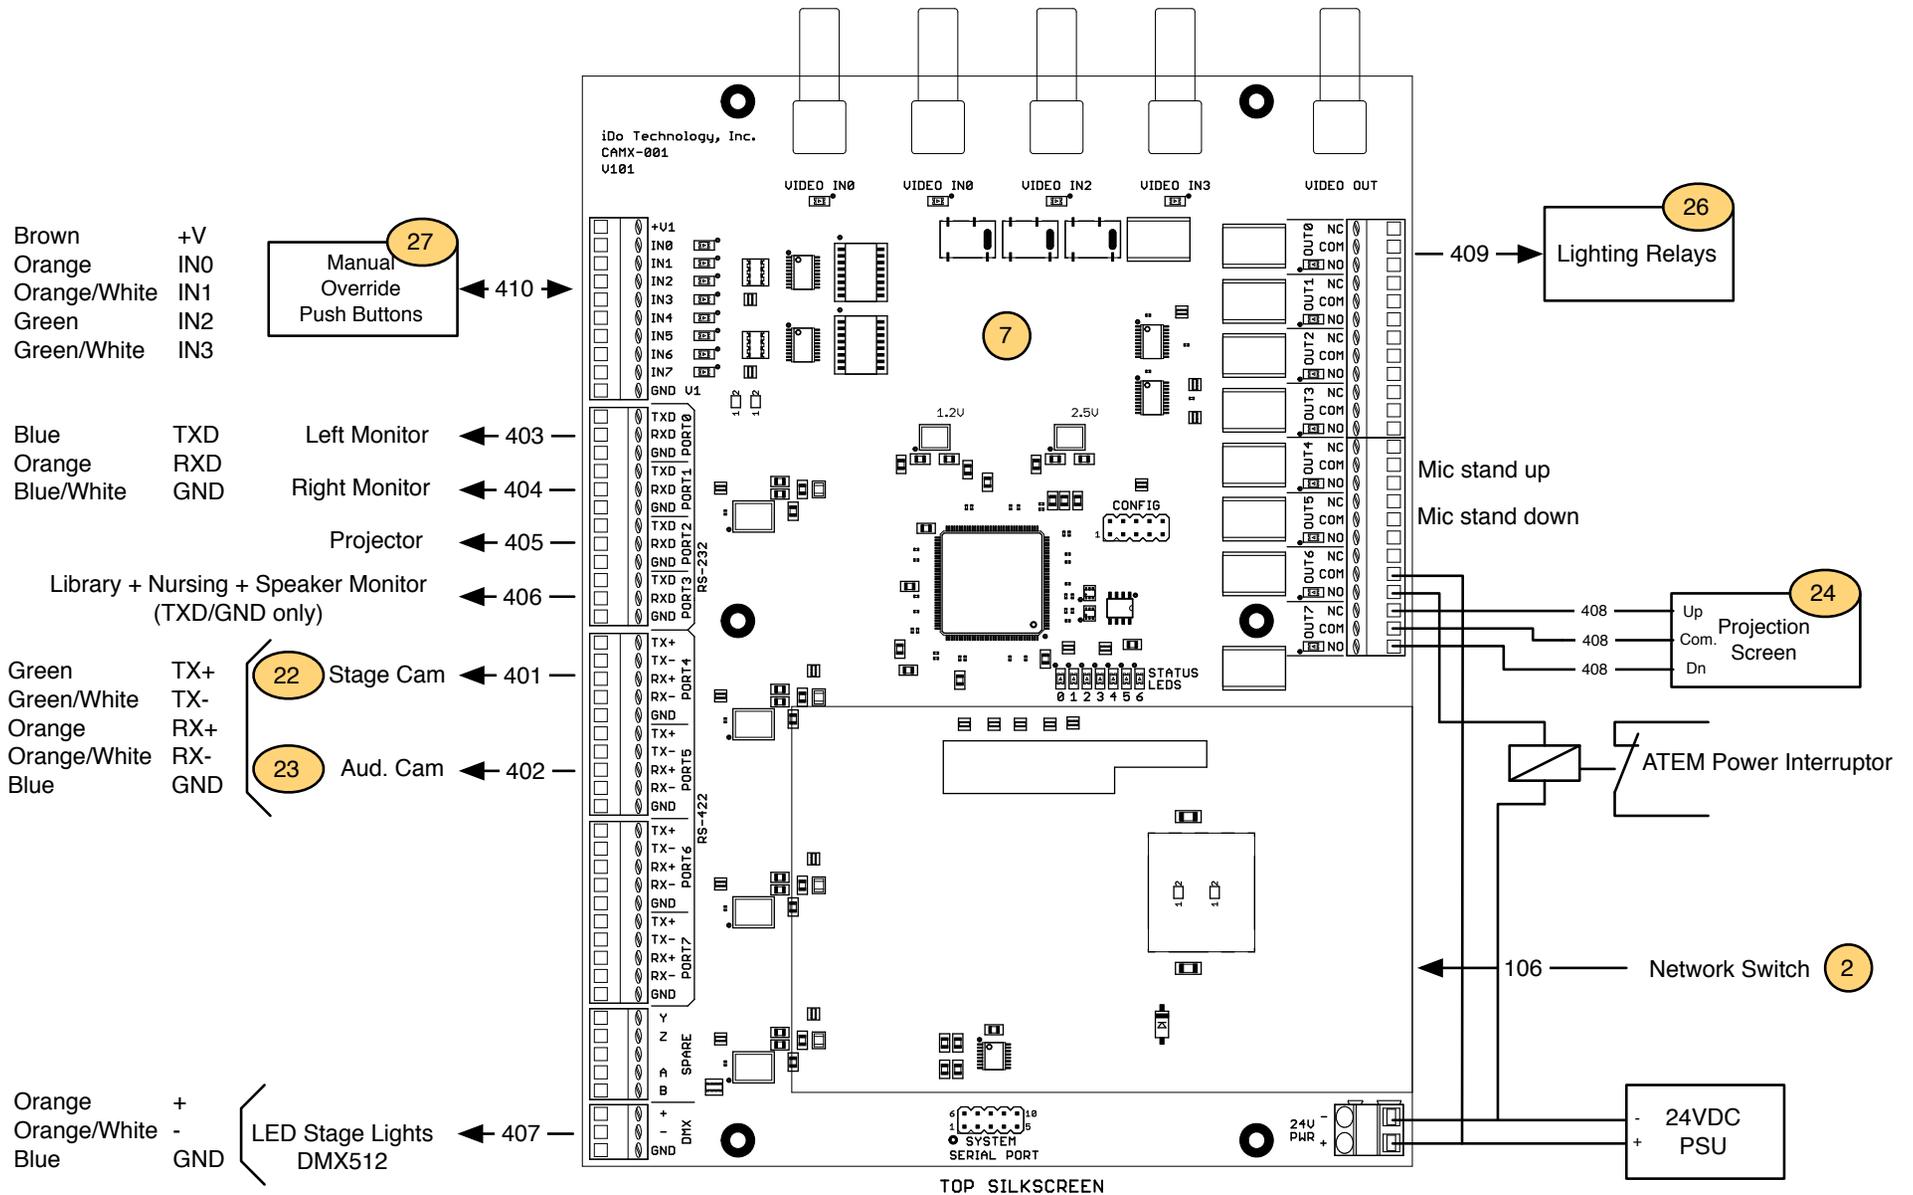

A/V System Locations & Cable Routing

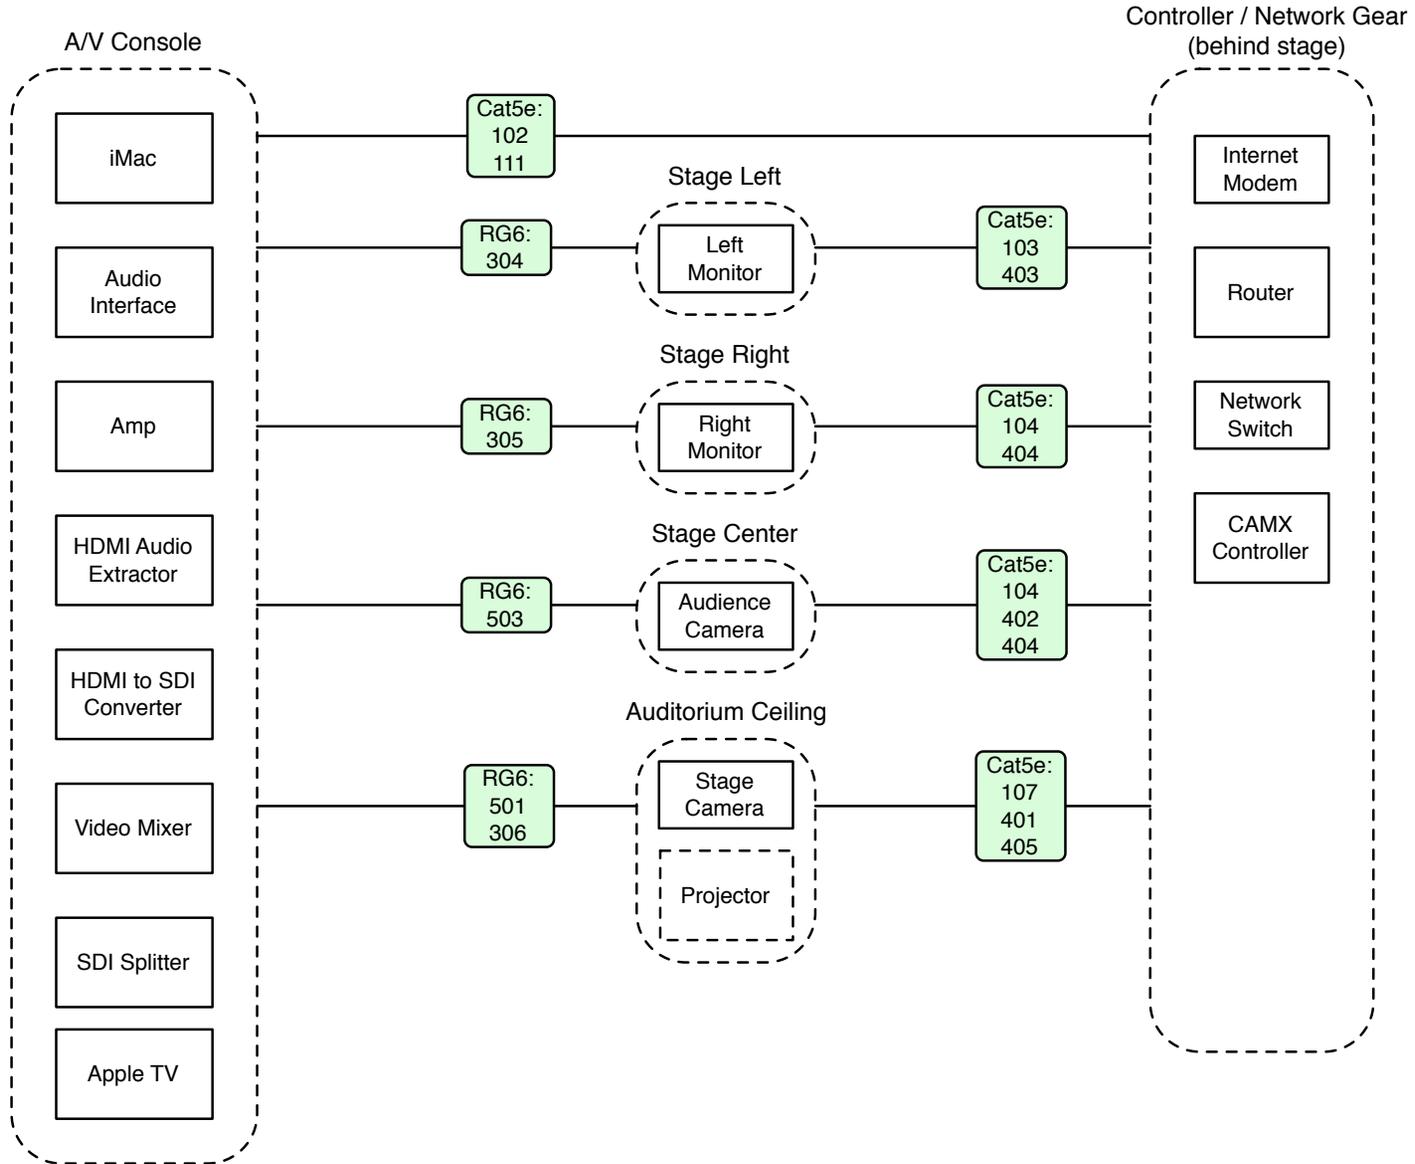

KHAV-SL Studio KH HD using Digital HD Cameras - Cabling Diagrams & Specifications

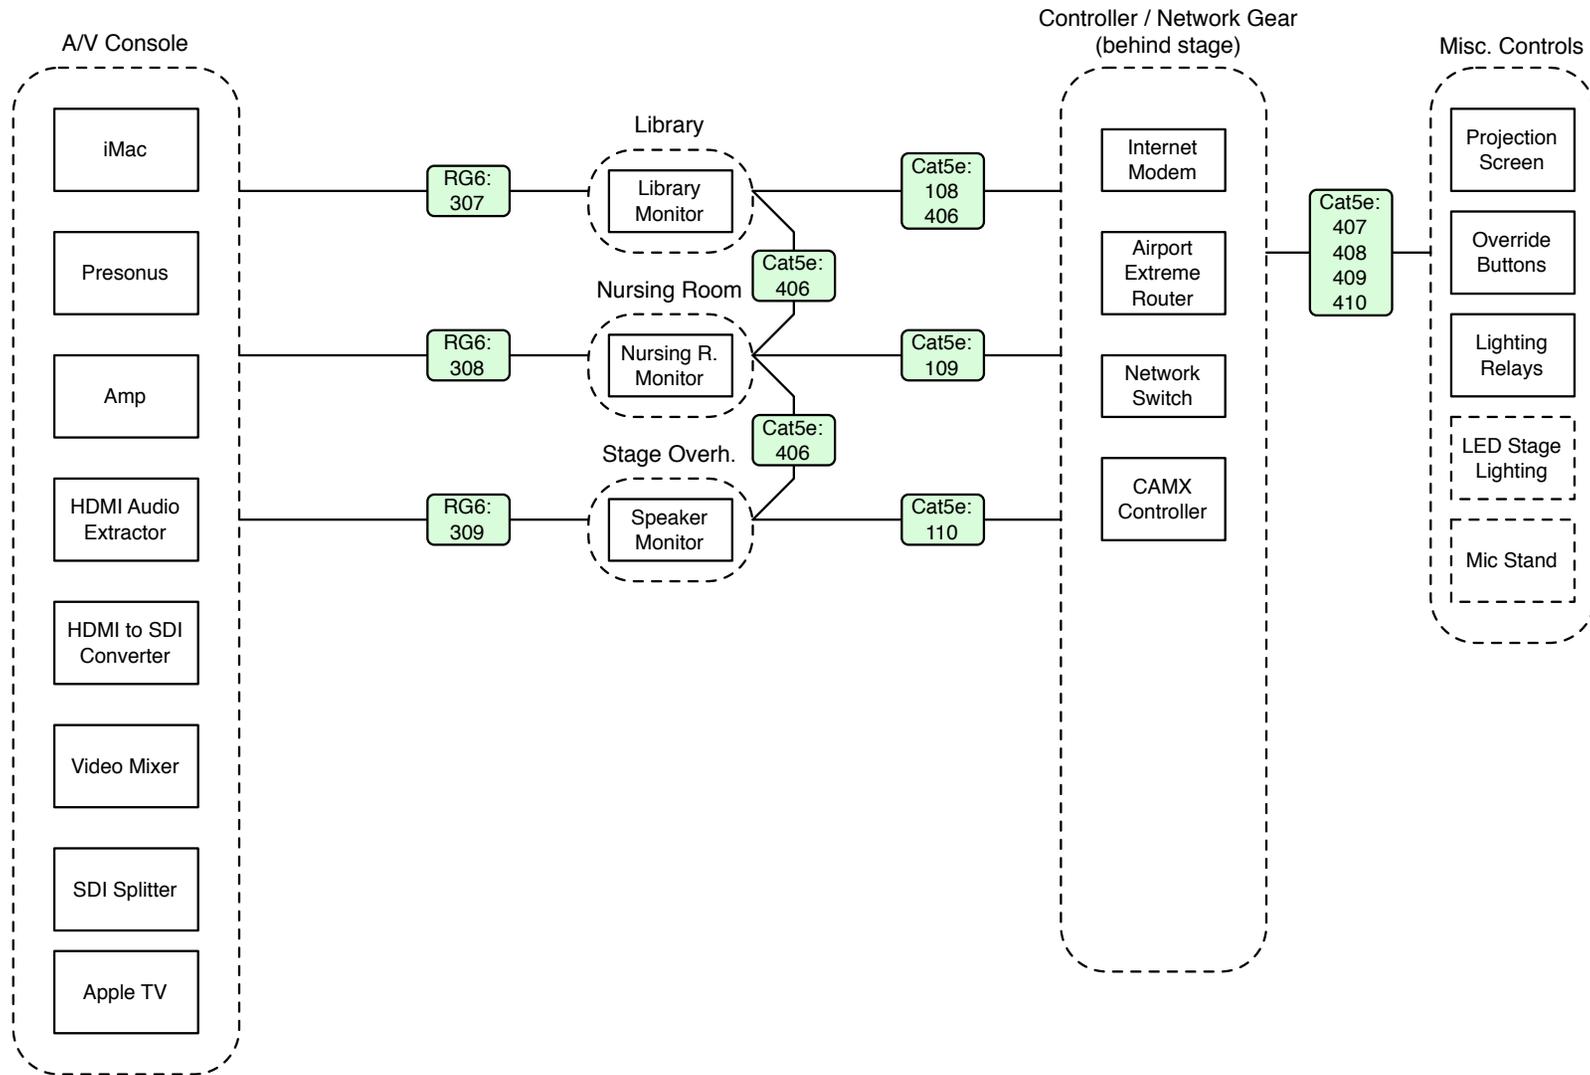

Components List

AV System Components

Item Numbers	Description	Manufacturer	Man. Part Nr	Supplier	Min. Amount
	Network components				
1	Internet modem (delivered by provider but might need to be replaced with a real modem. Don't accept routers unless configured to be modems)				
2	Router	Synology	RT1900AC		1
3	16 port 1 Gb network switch	Netgear		Amazon	1
	Cat5e Cable	Belden	Belden 1213		
	OR: Cat5e Cable	Belden	Belden 1583A		
	RJ45 Connectors - RJ45 CAT-5E				20
	Audio/Video components				
11	Digital Audio Workstation Interface	Zoom	TAC-8		1
21	Amplifier				
36	FM Transmitter				
25	HDMI to S/PDIF (RCA Coax) Audio Extractor	My Cable Mart	HA-HH51AU4 (or similar)	Amazon	1
22,23	Stage + Audience Camera	Sony	EVI-D80		2
30	Thunderbolt PCIe Cage	Sonnet	ECHO-EXP-SE2		1
31,32	Decklink Mini Recorder	BlackMagic	BDLKMINIREC	B&H PhotoVideo	2
500, 301	Thunderbolt cable	Apple			2
13	MiniDisplayPort to HDMI adapter	Belkin	F2CD021EB (or similar)	Amazon	1
36,37	SDI Splitter 1x2	Monoprice	10321	Monoprice	2
35	ATEM Television Studio	BlackMagic	SWATEMTVSTU	B&H PhotoVideo	1

KHAV-SL Studio KH HD using Digital HD Cameras - Cabling Diagrams & Specifications

Item Numbers	Description	Manufacturer	Man. Part Nr	Supplier	Min. Amount
15	SDI Splitter 1x8	Monoprice	10323	Monoprice	1
16,17,18,19,20,28	SDI to HDMI converter	Monoprice	10318	Monoprice	5
302, 314, 315, 316, 317, 318, 319, 322, 323, 505, 506	HDMI Cable 8 ft (shorter possible if SDI to HDMI converters planned close or behind equipment)				11
5,6	LCD/LED Flatscreen Monitor (70"), preferably RS232 controllable with published protocols				2
9,10	LCD/LED Flatscreen Monitor (42"), preferably RS232 controllable with published protocols				2
29	LCD/LED Flatscreen Monitor (22"), preferably RS232 controllable with published protocols				1
501,503, 505,506, 507,508, 303,304,305, 306,307,308, 309	RG6 Cable - Belden 1964A (non plenum) or 1965A (plenum)	Belden	1694A/1695A	Belden	as needed
	BNC Connectors	Belden	FSNS6BNCU (1964A) or FS6BNCU (1965A)		26+
240	RCA to RCA S/PDIF cable			Amazon	1
	CAMX Controller components				
7	A/V Equipment Controller	iDo Technology	CAMX	iDo Technology	1
	Power Supply 24 V (for Cam Controller)	Meanwell	DR-60-24		1
	DB9 Male (see what you need for your monitor serial connections)	TE Connectivity	5-747904-5	DigiKey	6?
	DB9 Female (see what you need for your monitor serial connections)	TE Connectivity	A102040-ND	DigiKey	6?

Item Numbers	Description	Manufacturer	Man. Part Nr	Supplier	Min. Amount
	DB9 connector enclosures	AMPLIMITE	5749914-1 / 5749914-1-ND	Digikey	6?
	Stage lighting components				
	LED wash light, controllable color and intensity	Chauvet	Slim PAR Pro VW		2
	XLR 3 pin male				2
	XLR 3 pin female				2
	120 Ohm 1/4W Carbon Resistor				2
	Computer components				
4	KHAudio + SL Studio KH HD: 27-inch iMac Retina 5K display, 3.2GHz quad-core Intel Core i5 16GB 1867MHz DDR3 SDRAM 1 TB Fusion Drive Magic Mouse 2 Apple Keyboard with Numeric Keypad (English)	Apple		Apple Store	1
38	Apple TV	Apple		Apple Store	1

Specifications Cat5e Cabling

CableID	Type	Signal	.1 Device (From)	.1 Connector	.2 Device (To)	.2 Connector
100	Cat5e	1G Ethernet	House Network Switch	RJ45	Airport Extreme Router	RJ45
101	Cat5e	1G Ethernet	Airport Extreme Router	RJ45	Network Switch	RJ45
102	Cat5e	1G Ethernet	Network Switch	RJ45	iMac at A/V Console	RJ45
103	Cat5e	1G Ethernet	Network Switch	RJ45	Left Monitor	RJ45
104	Cat5e	1G Ethernet	Network Switch	RJ45	Right Monitor	RJ45
106	Cat5e	1G Ethernet	Network Switch	RJ45	CAMX Controller	RJ45
107	Cat5e	1G Ethernet	Network Switch	RJ45	Projector	RJ45
108	Cat5e	1G Ethernet	Network Switch	RJ45	Library Monitor	RJ45
109	Cat5e	1G Ethernet	Network Switch	RJ45	Nursing Room Monitor	RJ45
110	Cat5e	1G Ethernet	Network Switch	RJ45	Speaker Monitor	RJ45
111	Cat5e	1G Ethernet	Network Switch	RJ45	ATEM Television Studio	RJ45
112	Cat5e	1G Ethernet	Network Switch	RJ46	Apple TV	RJ46
401	Cat5e	RS422	CAMX Controller		Stage Camera	Phoenix 9 pin
402	Cat5e	RS422	CAMX Controller		Audience Camera	Phoenix 9 pin
403	Cat5e	RS232	CAMX Controller		Left Monitor	
404	Cat5e	RS232	CAMX Controller		Right Monitor	
405	Cat5e	RS232	CAMX Controller		Projector	
406	Cat5e	RS232	CAMX Controller		Library + Nursing + Speaker (daisy chained)	
407	Cat5e	DMX512	CAMX Controller		First LED Stage Light	Male XLR
408	Cat5e	Controls	CAMX Controller		Projection Screen	
409	Cat5e	Controls	CAMX Controller		Lighting Relays	
410	Cat5e	Controls	CAMX Controller		Manual Override Push Buttons	
411	4x18 AWG	Controls	CAMX Controller		Mic Stand Up/Down	


Specifications RG6/S-Video/HDMI Cabling

CableID	Type	Signal	Part Number	Approx Length (ft)	.1 Device (From)	.1 Connector	.2 Device (To)	.2 Connector	Notes
501	RG6	Composite	Belden 1694A	??	Stage Cam (22)	BNC	SDI Splitter 1x2 (36)	BNC	
505	RG6	SDI-HD	Belden 1694A	3	SDI Splitter 1x2 (36)	BNC	Video Mixer (35)	BNC	
507	RG6	SDI-HD	Belden 1694A	3	SDI Splitter 1x2 (36)	BNC	Decklink Mini Recorder Card (31)	BNC	
503	RG6	Composite	Belden 1694A	??	Audience Cam (23)	BNC	SDI Splitter 1x2 (37)	BNC	
506	RG6	SDI-HD	Belden 1694A	3	SDI Splitter 1x2 (37)	BNC	Video Mixer (35)	BNC	
508	RG6	SDI-HD	Belden 1694A	3	SDI Splitter 1x2 (37)	BNC	Decklink Mini Recorder Card (32)	BNC	
303	RG6	SDI-HD	Belden 1694A	3	ATEM Television Studio (35)	BNC	SDI Spitter (15)	BNC	
304	RG6	SDI-HD	Belden 1694A	??	SDI Spitter (15)	BNC	SDI to HDMI Converter (16)	BNC	
305	RG6	SDI-HD	Belden 1694A	??	SDI Spitter (15)	BNC	SDI to HDMI Converter (17)	BNC	
306	RG6	SDI-HD	Belden 1694A	??	SDI Spitter (15)	BNC	SDI to HDMI Converter (18)	BNC	
307	RG6	SDI-HD	Belden 1694A	??	SDI Spitter (15)	BNC	SDI to HDMI Converter (19)	BNC	
308	RG6	SDI-HD	Belden 1694A	??	SDI Spitter (15)	BNC	SDI to HDMI Converter (20)	BNC	
309	RG6	SDI-HD	Belden 1694A	6	SDI Spitter (15)	BNC	SDI to HDMI Converter (28)	BNC	
302	HDMI	HDMI		3	MiniDisplay to HDMI Adapter (13)	HDMI	Video Mixer (35)	HDMI	
322	HDMI	HDMI		3	Apple TV (38)	HDMI	Video Mixer (35)	HDMI	
323	HDMI	HDMI		3	Video Mixer (35)	HDMI	HDMI Audio Extractor (25)	HDMI	
314	HDMI	HDMI		3	SDI to HDMI Converter (16)	HDMI	Left Monitor (5)	HDMI	
315	HDMI	HDMI		3	SDI to HDMI Converter (17)	HDMI	Left Monitor (6)	HDMI	
316	HDMI	HDMI		3	SDI to HDMI Converter (18)	HDMI	Projector (8)	HDMI	
317	HDMI	HDMI		3	SDI to HDMI Converter (19)	HDMI	Library Monitor (9)	HDMI	
318	HDMI	HDMI		3	SDI to HDMI Converter (20)	HDMI	Nursing Monitor (10)	HDMI	
319	HDMI	HDMI		3	SDI to HDMI Converter (28)	HDMI	Speaker Monitor (29)	HDMI	
240	S/PDIF	S/PDIF		3	HDMI Audio Extractor (25)	RCA	Audio Interface (11)	RCA	

Cable Termination


Cat5e Cable Terminations

Each end an RJ45 connector:

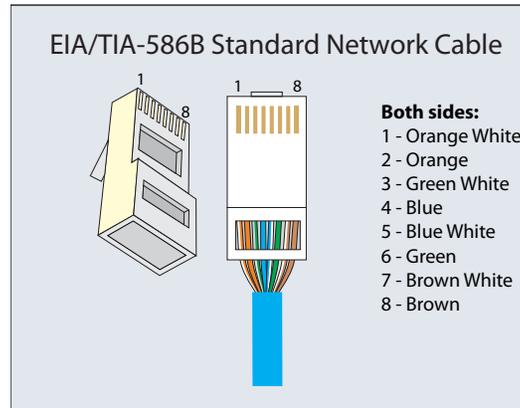


RG6 Video Cable Terminations

Each end a BNC connector:

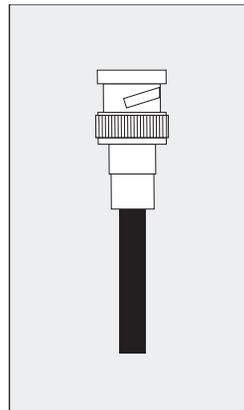

Sony BRC-Z330 Camera Connections

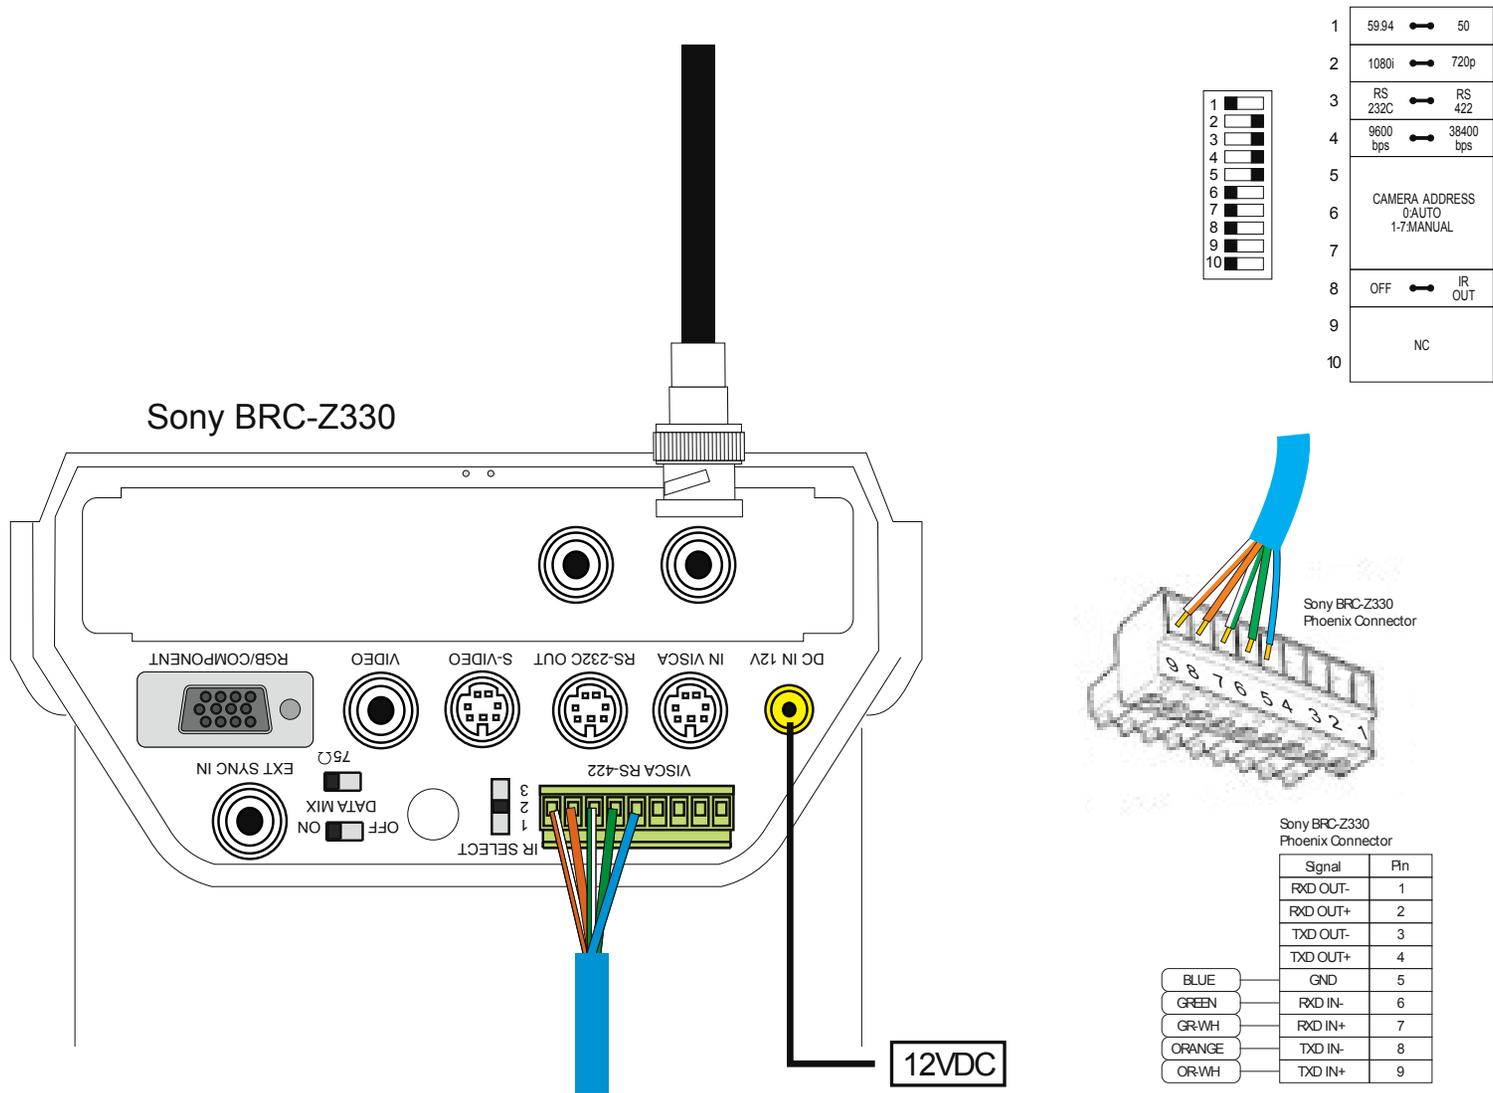

ATEM Television Studio (35)




ATEM Inputs

1. iMac Media HDMI feed (cable 302)
2. Apple TV / External HDMI feed (cable 322)
3. Stage Camera HDMI feed (cable 505)
4. Audience Camera HDMI feed (cable 506)

SDI-HD Program Output to be connected to SDI-HD Splitter (15) using cable 303
HDMI Program Output to be connected to HDMI Audio Extractor (25) using cable 323

SDI Audio Extractor (25)

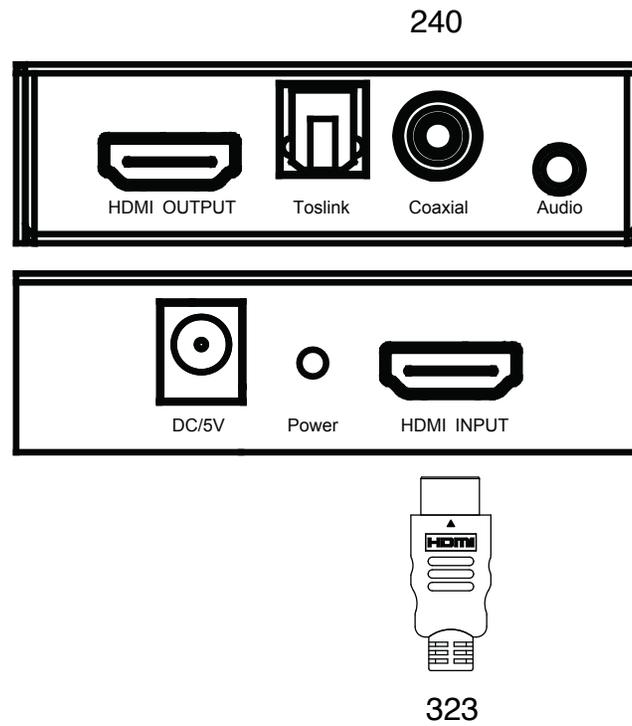

SDI Splitter Connections (15)

